


# SERVOVALVES

## DIRECT DRIVE SERVOVALVES

### D633/D634

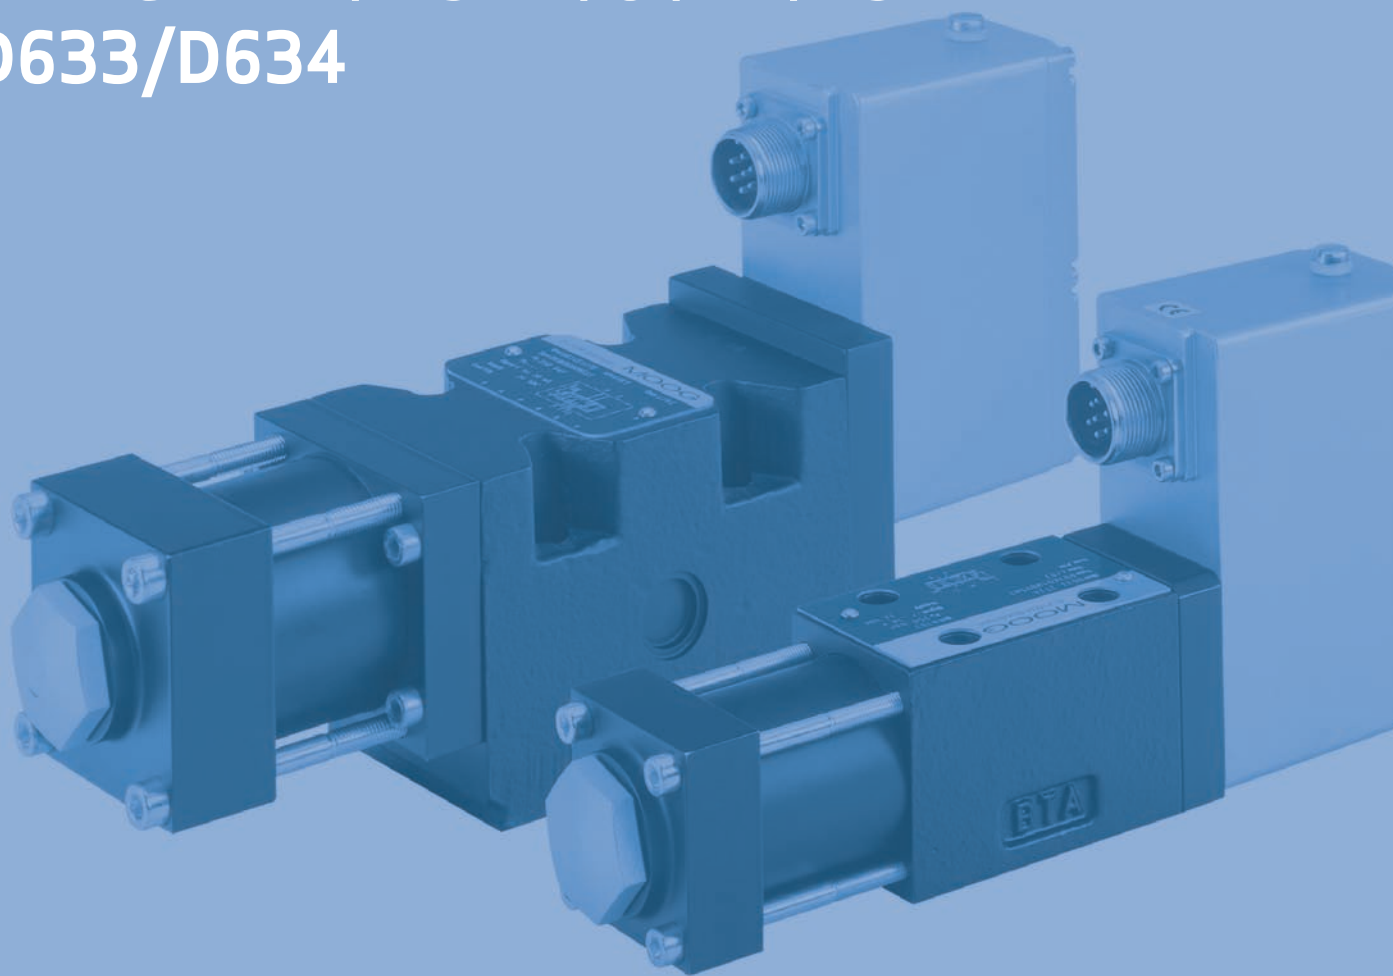

Rev. 2, 04/2009

SERVOVALVES  
FOR ELECTROHYDRAULIC POSITION,  
VELOCITY, PRESSURE OR FORCE CONTROL SYSTEMS  
WITH HIGH DYNAMIC RESPONSE REQUIREMENTS

ISO 4401 SIZES 03 AND 05

| SECTION                          | PAGE | MOOG SERVO- AND PROPORTIONAL CONTROL VALVES |
|----------------------------------|------|---------------------------------------------|
| General                          | 2    |                                             |
| Benefits and Function            | 3    |                                             |
| General technical dates, Symbols | 4    |                                             |
| Electronics                      | 5    |                                             |
| Technical Data                   | 7    |                                             |
| Ordering Information             | 13   |                                             |

### D633 AND D634 SERIES SERVO CONTROL VALVES

The D633 and D634 Series are Direct Drive Valves (DDV) with electric closed loop spool position control.

These valves are throttle valves for 3-, 4-, and 2x2-way applications. They are suitable for electrohydraulic position, velocity, pressure or force control systems including those with high dynamic response requirements.

The spool drive device is a permanent magnet linear force motor which can actively stroke the spool from its spring centred position in both directions. This is an advantage compared with proportional solenoids with one force direction only. The closed loop spool position electronics and pulse width modulated (PWM) drive electronics are integrated into the valve.

The integrated electronics of the valves is a new development featuring SMD technology with pulse width modulated (PWM) current output stage and requires a 24 VDC power supply.



The valve series described in this catalogue have successfully passed EMC tests required by EC Directive. Please refer to the respective references in the electronics section.



Valves available with explosion protection to EN 50018 and 55019, class II 2G EExde B+H<sub>2</sub> T4, DMT 00 ATEX E 037, CE 0470 at D633 series and II 2G EExde B+H<sub>2</sub> T3, DMT 00 ATEX E 037, CE 0470 at D634 series.

Note: Installation dimensions and electric connection altered. Special data sheet on request.

### NOTICE

- ☐ Before installation of the valve into the system the complete hydraulic system must be flushed.
- ☐ Please read the notes in section "Electronics", page 6.

This catalogue is for users with technical knowledge. To ensure that all necessary characteristics for function and safety of the system are given, the user has to check the suitability of the products described herein. In case of doubt please contact Moog.

Our quality management system is conform to DIN EN ISO 9901.

## OPERATIONAL BENEFITS OF DIRECT DRIVE SERVO VALVES (DDV)


- ❑ Directly driven by a permanent magnet linear force motor with high force level
- ❑ No pilot oil flow required
- ❑ Pressure independent dynamic performance
- ❑ Low hysteresis and low threshold
- ❑ Low current consumption at and near hydraulic null
- ❑ Standardised spool position monitoring signal with low residual ripple
- ❑ Electric null adjust
- ❑ With loss of supply voltage, or broken cable, or emergency stop the spool returns to its spring centred position without passing a load move position.

## DIRECT DRIVE VALVE (DDV) OPERATION

The position control loop for the spool with position transducer and linear force motor is closed by the integrated electronics. An electric signal corresponding to the desired spool position is applied to the integrated electronics and produces a pulse width modulated (PWM) current to drive the linear force motor. An oscillator excites the spool position transducer (LVDT) producing an electric signal proportional to spool position.


The demodulated spool position signal is compared with the command signal and the resulting spool position error causes current in the force motor coil until the spool has moved to its commanded position, and the spool position error is reduced to zero. The resulting spool position is thus proportional to the command signal.

### D633 Series single stage Servo Control Valve




#### Hydraulic symbol:

Symbol shown with electric supply on and zero command signal.

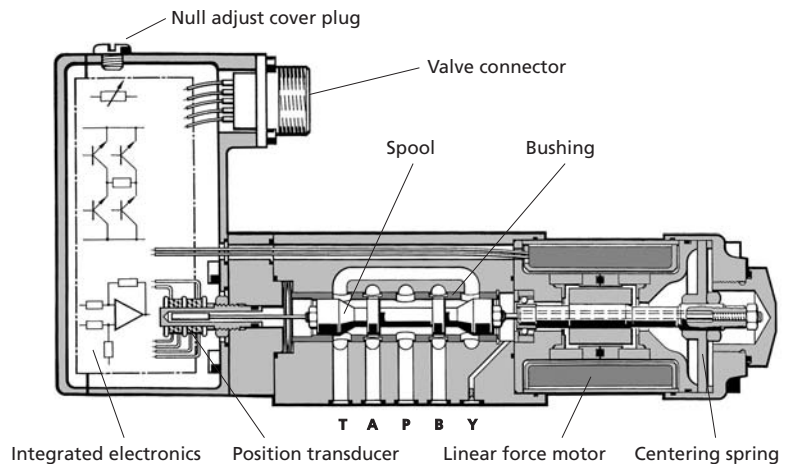

## PERMANENT MAGNET LINEAR FORCE MOTOR OPERATION

The linear force motor is a permanent magnet differential motor. The permanent magnets provide part of the required magnetic force. For the linear force motor the current needed is considerably lower than would be required for a comparable proportional solenoid. The linear force motor has a neutral mid-position from which it generates force and stroke in both directions. Force and stroke are proportional to current. High spring stiffness and resulting centering force plus external forces (i.e. flow forces, friction forces due to contamination) must be overcome during out-stroking. During backstroking to centre position the spring force adds to the motor force and provides additional spool driving force which makes the valve very less contamination sensitive. The linear force motor needs very low current in the spring centred position. Proportional solenoid systems require for the same function two solenoids with more cabling. Another solution uses a single solenoid, working against a spring. In case of current loss in the solenoid, the spring drives the spool to the end position by passing through a fully open position. This can lead to uncontrolled load movements.

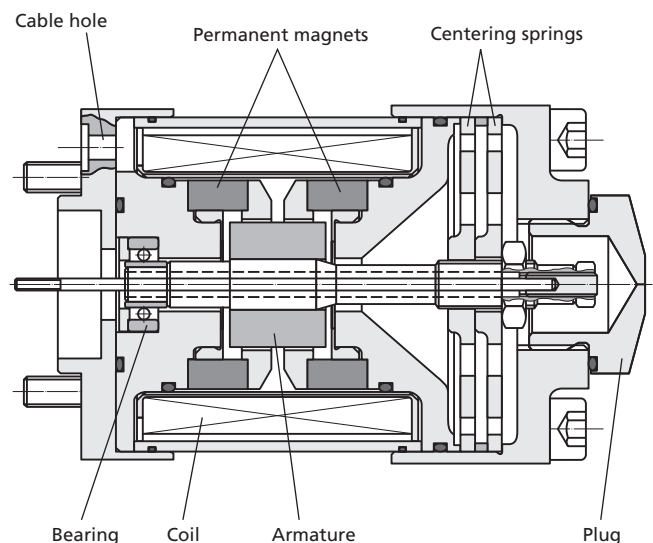

## PERFORMANCE SPECIFICATIONS FOR STANDARD MODELS

### Operating pressure range

Ports P, A and B up to 350 bar (5000 psi)  
Port T see data for individual series

### Temperature range

Ambient -20 °C to +60 °C (-4°F to +140°F)  
Fluid -20 °C to +80 °C (-4°F to +170°F)

### Seal material

NBR, FPM,  
others on request

### Operating fluid

mineral oil based hydraulic  
fluid (DIN 51524, part 1 to 3),  
others on request

**Viscosity** recommended 15 to 100 mm<sup>2</sup>/s  
allowed 5 to 400 mm<sup>2</sup>/s

### System filtration

High pressure filter (without bypass, but with dirt alarm) mounted in the main flow and if possible directly upstream of the valve.

### Class of cleanliness

The cleanliness of the hydraulic fluid particularly effects the performance (spool positioning, high resolution) and wear (metering edges, pressure gain, leakage) of the servo valve.

### Recommended cleanliness class

For normal operation ISO 4406 < 15 / 12  
For longer life (wear) ISO 4406 < 14 / 11

### Filter rating recommended

For normal operation  $\beta_{10} \geq 75$  (10 µm absolute)  
For longer life (wear)  $\beta_6 \geq 75$  (6 µm absolute)

### Installation options

any position,  
fixed or movable

### Vibration


30 g, 3 axes

### Degree of protection

EN60529: class IP 65 with  
mating connector mounted  
Delivered with an oil sealed  
shipping plate

### Shipping plate


## 4-WAY FUNCTION

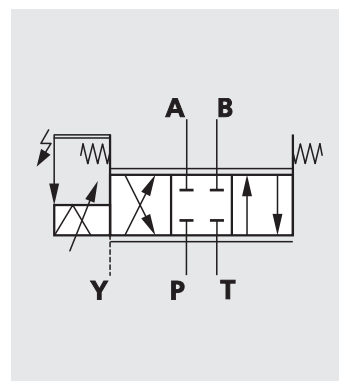

4-way version  
spring centred

- ☐ Flow control (throttle valve) in port A and port B
- ☐ Port Y required if pressure  $p_T > 50$  bar (715 psi) in port T
- ☐ for 3-way function close port A or port B of the manifold
- ☐ Spools with exact axis cut, 1,5 to 3 % or 10 % overlap available

## 2X2-WAY FUNCTION

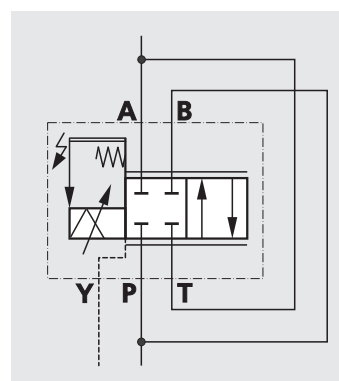

2x2-way version  
(Y-Port required)

- ☐ Flow control (throttle valve) in port A
- ☐ Port Y required
- ☐ Connect externally port P with port B, and port A with port T

## VALVE FLOW CALCULATIONS

The actual valve flow is dependent on the spool position and the pressure drop across the spool lands.

At 100% command signal (i.e. +10 VDC = 100% valve opening) the valve flow at rated pressure drop  $\Delta p_N = 35$  bar per metering land is the rated flow  $Q_N$ . For other than rated pressure drop the valve flow changes at constant command signal according to the square root function for sharp edged orifices.

$$Q = Q_N \cdot \sqrt{\frac{\Delta p}{\Delta p_N}}$$


$Q$  [l/min] = calculated flow

$Q_N$  [l/min] = rated flow

$\Delta p$  [bar] = actual valve pressure drop

$\Delta p_N$  [bar] = rated valve pressure drop

The real valve flow  $Q$  calculated in this way should result in an average flow velocity in ports P, A, B or T of less than 30 m/s.

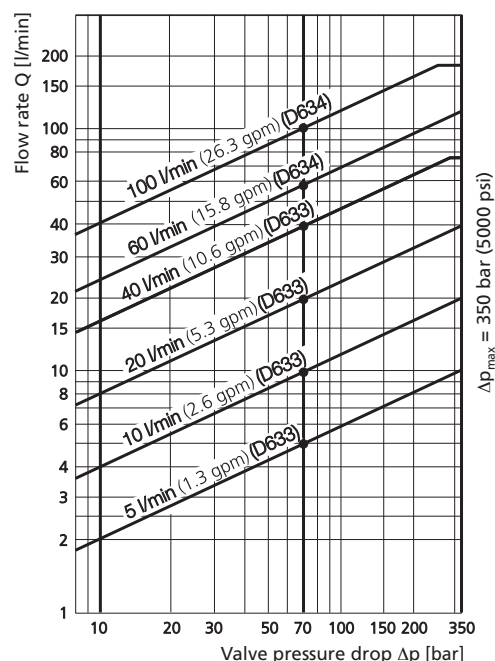

---

**GENERAL REQUIREMENTS FOR VALVE ELECTRONICS**

- ❑ Supply 24 VDC, min. 19 VDC, max. 32 VDC
  - Current consumption  $I_{Amax}$       for D633 1.2 A
  - for D634 2.2 A
  - External fuse per valve              for D633 1.6 A (slow)
  - for D634 2.5 A (slow)
- ❑ All signal lines, also those of external transducers, shielded.
- ❑ Shielding connected radially to  $\perp$  (0 V), power supply side, and connected to the mating connector housing (EMC).
- ❑ **EMC:** Meets the requirements of emission: EN55011:1998+A1:1999 (limit class: B) and immunity: EN61000-6-2:1999
- ❑ Minimum cross-section of all leads  $\geq 0.75 \text{ mm}^2$  (0.001 in<sup>2</sup>). Consider voltage losses between cabinet and valve.
- ❑ Note: When making electric connections to the valve (shield, protective earth) appropriate measures must be taken to ensure that locally different earth potentials do not result in excessive ground currents. See also Moog Application Note TN 353.

VALVE ELECTRONICS WITH SUPPLY VOLTAGE 24 VOLT AND 6+PE POLE CONNECTOR

Command signal 0 to  $\pm 10$  mA

floating, Valves with current command input

The spool stroke of the valve is proportional to  $I_D = -I_E$ .  
100 % valve opening  $P \rightarrow A$  and  $B \rightarrow T$  is achieved at  $I_D = +10$  mA. At 0 mA command the spool is in centred position. The input pins D and E are inverting. Either pin D or E is used according to the required operating direction. The other pin is connected to signal ground at cabinet side.

Command signal 0 to  $\pm 10$  V,


Valves with voltage command input

The spool stroke of the valve is proportional to  $(U_D - U_E)$ .  
100 % valve opening  $P \rightarrow A$  and  $B \rightarrow T$  is achieved at  $(U_D - U_E) = +10$  V.  
At 0 V command the spool is in centred position. The input stage is a differential amplifier. If only one command signal is available, pin D or E is connected to signal ground at cabinet side, according to the required operating direction.

Actual value 4 to 20 mA

The actual spool position value can be measured at pin F (see diagram below). This signal can be used for monitoring and fault detection purposes.  
The spool stroke range corresponds to 4 to 20 mA.  
The centred position is at 12 mA. 20 mA corresponds to 100 % valve opening  $P \rightarrow A$  and  $B \rightarrow T$ . The position signal output 4 to 20 mA allows to detect a cable break when  $I_F = 0$  mA.


Circuit diagram for measurement of actual value  $I_F$  (position of spool) for valves with 6+PE pole connector

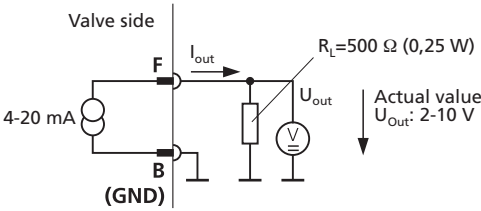

The position signal output 4 to 20 mA allows to detect a cable break when  $I_F = 0$  mA.  
For failure detection purposes it is advised to connect pin F of the mating connector and route this signal to the control cabinet.

WIRING FOR VALVES WITH 6+PE POLE CONNECTOR

to EN 175201 Part 804<sup>1)</sup>, and mating connector (type R and S, metal shell) with leading protective earth connection ( $\perp$ ).  
See also Application Note AM 426 E.

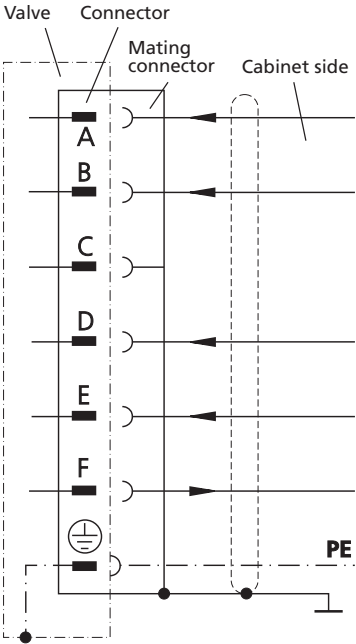

| Function                              | Current command<br>0 to $\pm 10$ mA floating                                                                                                                                                                                                  | Voltage command<br>0 to $\pm 10$ VDC |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Supply                                | 24 VDC (19 to 32 VDC)                                                                                                                                                                                                                         |                                      |
| Supply / Signal ground                | $\perp$ (0 V)                                                                                                                                                                                                                                 |                                      |
| not used                              |                                                                                                                                                                                                                                               |                                      |
| Input rated command<br>(differential) | Input command $I_D = -I_E$ : 0 to $\pm 10$ mA<br>Input command (inv.) $I_E = -I_D$ : 0 bis $\pm 10$ mA<br>( $R_e = 200$ K $\Omega$ )<br><br>Input voltage $U_{D-B}$ and $U_{E-B}$ for both signal types is limited to min. -15 V, max. +24 V. |                                      |
| Output actual valve<br>spool position | $I_{F-B} = 4$ to 20 mA. At 12 mA spool is in centred position.<br>$R_L = 300$ to 500 $\Omega$                                                                                                                                                 |                                      |
| Protective earth                      |                                                                                                                                                                                                                                               |                                      |

<sup>1)</sup> formerly DIN 43563

**PERFORMANCE SPECIFICATIONS FOR STANDARD MODELS**

|                                                                      |             |                                                         |
|----------------------------------------------------------------------|-------------|---------------------------------------------------------|
| <b>Model . . . Type</b>                                              |             | <b>D633</b>                                             |
| <b>Mounting pattern</b> with or without leakage port Y <sup>3)</sup> |             | ISO 4401-03-03-0-94                                     |
| <b>Port diameter</b>                                                 | mm (in)     | 7.9 (0.31)                                              |
| <b>Valve version <sup>2)</sup></b>                                   |             | Single stage, spool in bushing<br>3-way, 4-way, 2x2-way |
| <b>Spool actuation</b>                                               |             | directly, with permanent magnet<br>linear force motor   |
| <b>Pilot supply</b>                                                  |             | none                                                    |
| <b>Mass</b>                                                          | kg (lb)     | 2.5 (5.5)                                               |
| <b>Rated flow</b> ( $\pm 10\%$ ) at $\Delta p_N = 35$ bar per land   | l/min (gpm) | 5 / 10 / 20 / 40 (1.3 / 2.6 / 5.3 / 10.6)               |
| <b>Max. valve flow</b>                                               | l/min (gpm) | 75 (19.8)                                               |
| <b>Operating pressure max.</b>                                       |             |                                                         |
| Ports P,A,B                                                          | bar (psi)   | 350 (5000)                                              |
| Port T ohne Y                                                        | bar (psi)   | 50 (715)                                                |
| Port T mit Y                                                         | bar (psi)   | 350 (5000)                                              |
| Port Y                                                               | bar (psi)   | directly to tank                                        |
| <b>Response time</b> for 0 to 100% stroke, typical                   | ms          | $\leq 12$                                               |
| <b>Threshold <sup>1)</sup></b>                                       | %           | < 0.1                                                   |
| <b>Hysteresis <sup>1)</sup></b>                                      | %           | < 0.2                                                   |
| <b>Null shift <sup>1)</sup></b> with $\Delta T = 55$ K               | %           | < 1.5                                                   |
| <b>Null leakage flow <sup>1)</sup></b> max. (axis cut)               | l/min (gpm) | 0.15 / 0.3 / 0.6 / 1.2 (0.04 / 0.08 / 0.16 / 0.32)      |

1) At operating pressure  $p_p = 140$  bar (2000psi), fluid viscosity of  $32 \text{ mm}^2/\text{s}$  ( $0.05 \text{ in}^2/\text{s}$ ) and fluid temperature of  $40^\circ\text{C}$  ( $104^\circ\text{F}$ )

2) See symbols page 4


3) Leakage port Y must be used

☐ with 3- and 4-way function and  $p_T > 50$  bar (715psi)


☐ with 2x2-way function

CHARACTERISTIC CURVES (TYPICAL)


Step response

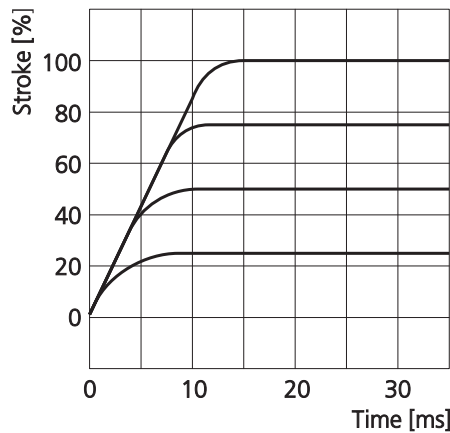


Flow signal characteristic curve

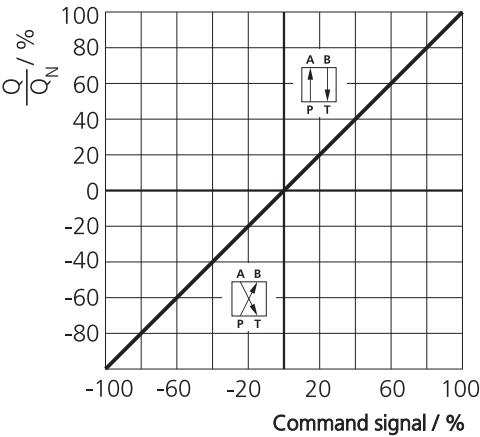


Frequency response

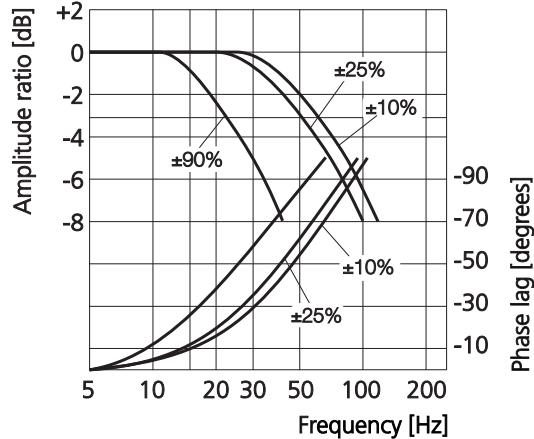


Valve flow diagram

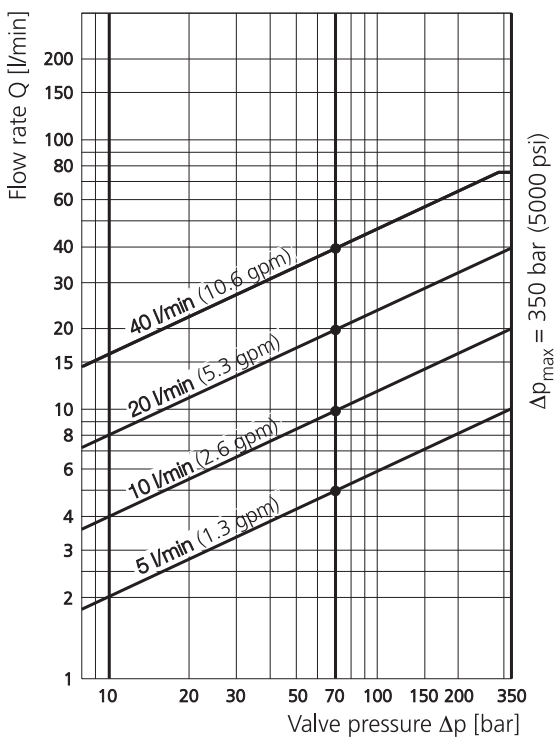

Pressure signal characteristic curve

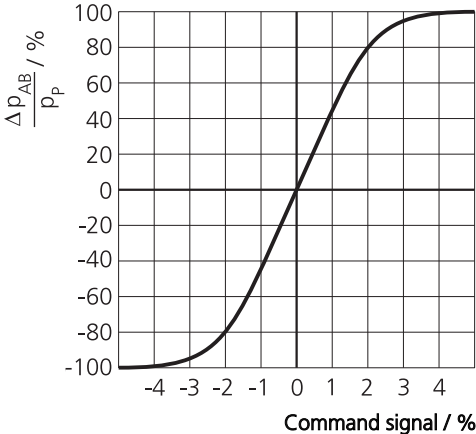

## INSTALLATION DRAWING

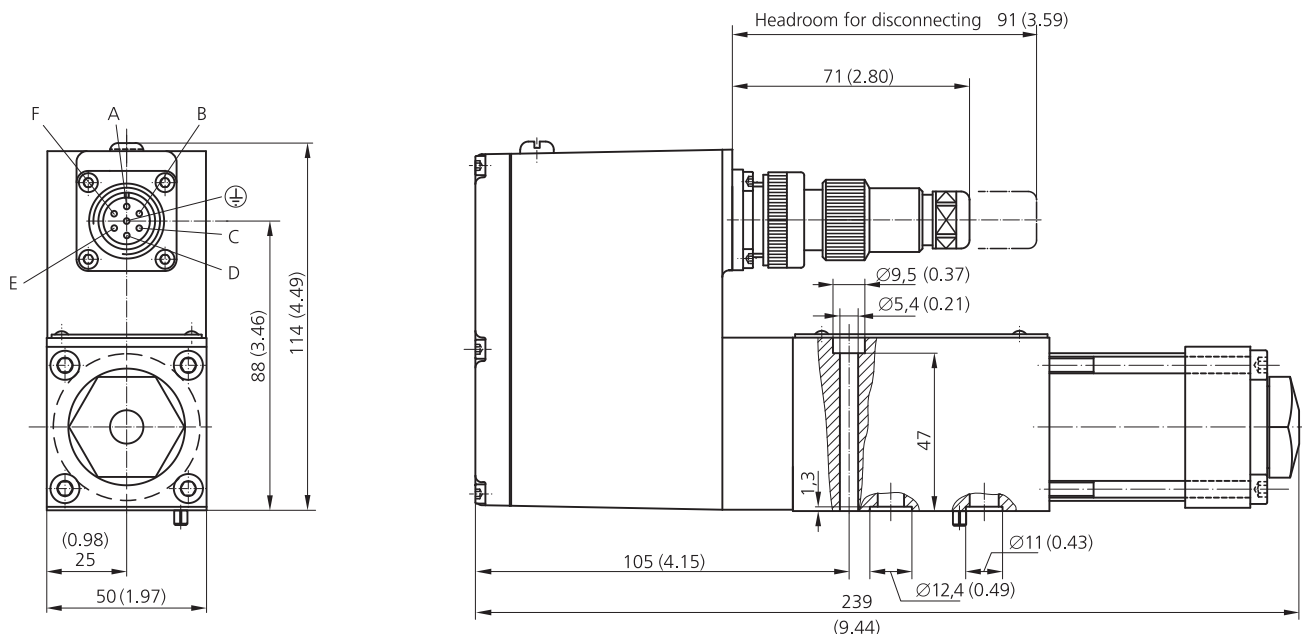

### Mounting pattern


ISO 4401-03-03-0-94, without X port

mm

|   | P    | A    | B    | T    | X <sup>1)</sup> | Y    | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | G     |
|---|------|------|------|------|-----------------|------|----------------|----------------|----------------|----------------|-------|
|   | Ø7,5 | Ø7,5 | Ø7,5 | Ø7,5 |                 | Ø3,3 | M5             | M5             | M5             | M5             | 4     |
| x | 21,5 | 12,7 | 30,2 | 21,5 |                 | 40,5 | 0              | 40,5           | 40,5           | 0              | 33    |
| y | 25,9 | 15,5 | 15,5 | 5,1  |                 | 9    | 0              | -0,75          | 31,75          | 31             | 31,75 |

inch

|   | P     | A     | B     | T     | X <sup>1)</sup> | Y     | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | G    |
|---|-------|-------|-------|-------|-----------------|-------|----------------|----------------|----------------|----------------|------|
|   | Ø0.30 | Ø0.30 | Ø0.30 | Ø0.30 |                 | Ø0.13 | M5             | M5             | M5             | M5             | 0.16 |
| x | 0.85  | 0.50  | 1.19  | 0.85  |                 | 1.60  | 0              | 1.60           | 1.60           | 0              | 1.30 |
| y | 1.02  | 0.61  | 0.61  | 0.20  |                 | 0.35  | 0              | -0.03          | 1.25           | 1.22           | 1.25 |

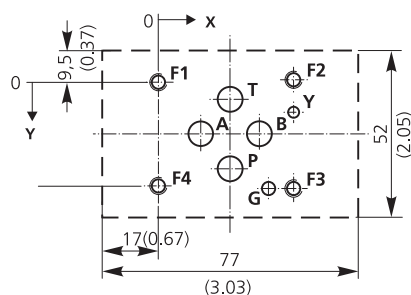

<sup>1)</sup> Port X must not be drilled, not sealed at valve base.

Mounting surface needs flat within 0,01 mm (0.0004 in) over a distance of 100 mm (3.94 in). Average surface finish value, Ra = 0.8 µm.

## Spare parts and Accessories

|                                                              |                                             |                    |                         |                                                     |
|--------------------------------------------------------------|---------------------------------------------|--------------------|-------------------------|-----------------------------------------------------|
| O-Rings (included in delivery)                               |                                             |                    | NBR 90 Shore            | FPM 90 Shore                                        |
| for ports P,T,A,B                                            | 4 pieces ID 9,25 x Ø 1,8 (ID 0.36 x Ø 0.07) |                    | 45122 013               | 42082 013                                           |
| for port Y                                                   | 1 piece ID 7,65 x Ø 1,8 (ID 0.30 x Ø 0.07)  |                    | 45122 012               | 42082 012                                           |
| Mating connector, waterproof IP65 (not included in delivery) |                                             |                    | for cable dia           | min. Ø 10 mm (0.394 in),<br>max. Ø 12 mm (0.472 in) |
| 6+PE-pole                                                    | B97007 061                                  | EN 175201 Part 804 |                         |                                                     |
| Flushing plates                                              | for P,A,B,T,X,Y<br>B46634 002               |                    |                         |                                                     |
| Mounting manifolds                                           | on request                                  |                    |                         |                                                     |
| Mounting bolts (not included in delivery)                    | M 5 x 55 DIN EN ISO 4762-10.9               | A03665 050 055     | required torque         | required                                            |
|                                                              |                                             |                    | 8.5 Nm (75 inch pounds) | 4 pieces                                            |

## PERFORMANCE SPECIFICATIONS FOR STANDARD MODELS

|                                                                      |             |                                                         |
|----------------------------------------------------------------------|-------------|---------------------------------------------------------|
| <b>Model . . . Type</b>                                              |             | <b>D634</b>                                             |
| <b>Mounting pattern</b> with or without leakage port Y <sup>3)</sup> |             | ISO 4401-05-05-0-94                                     |
| <b>Port diameter</b>                                                 | mm (in)     | 11.5 (0.45)                                             |
| <b>Valve version <sup>2)</sup></b>                                   |             | Single stage, spool in bushing<br>3-way, 4-way, 2x2-way |
| <b>Spool actuation</b>                                               |             | directly, with permanent magnet<br>linear force motor   |
| <b>Pilot supply</b>                                                  |             | none                                                    |
| <b>Mass</b>                                                          | kg (lb)     | 6.3 (13.9)                                              |
| <b>Rated flow</b> ( $\pm 10\%$ ) at $\Delta p_N = 35$ bar per land   | l/min (gpm) | 60 / 100 (15.8 / 26.3)                                  |
| <b>Max. valve flow</b>                                               | l/min (gpm) | 185 (48.8)                                              |
| <b>Operating pressure</b> max.                                       |             |                                                         |
| Ports P,A,B                                                          | bar (psi)   | 350 (5000)                                              |
| Port T ohne Y                                                        | bar (psi)   | 50 (715)                                                |
| Port T mit Y                                                         | bar (psi)   | 350 (5000)                                              |
| Port Y                                                               | bar (psi)   | directly to tank                                        |
| <b>Response time</b> for 0 to 100% stroke, typical                   | ms          | $\leq 20$                                               |
| <b>Threshold <sup>1)</sup></b>                                       | %           | < 0.1                                                   |
| <b>Hysteresis <sup>1)</sup></b>                                      | %           | < 0.2                                                   |
| <b>Null shift <sup>1)</sup></b> with $\Delta T = 55$ K               | %           | < 1.5                                                   |
| <b>Null leakage flow <sup>1)</sup></b> max. (axis cut)               | l/min (gpm) | 1.2 / 2.0 (0.26 / 0.43)                                 |

1) At operating pressure  $p_p = 140$  bar (2000 psi), fluid viscosity of  $32 \text{ mm}^2/\text{s}$  ( $0.05 \text{ in}^2/\text{s}$ ) and fluid temperature of  $40^\circ\text{C}$  ( $104^\circ\text{F}$ )

2) See symbols page 4


3) Leakage port Y must be used

☐ with 3- and 4-way function and  $p_T > 50$  bar (715 psi)


☐ with 2x2-way function

## CHARACTERISTIC CURVES (TYPICAL)


Step response

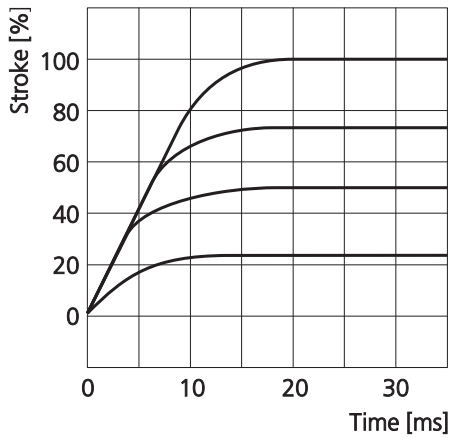


Flow signal characteristic curve

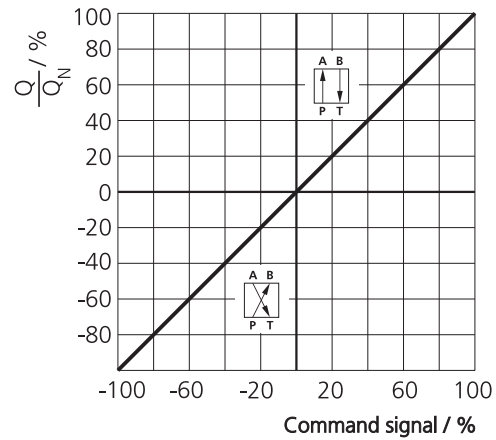


Frequency response

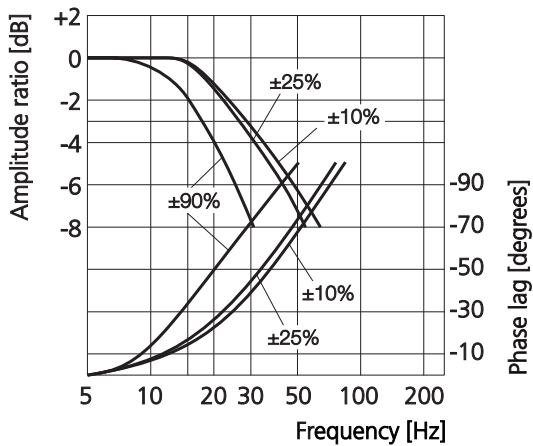


Valve flow diagram

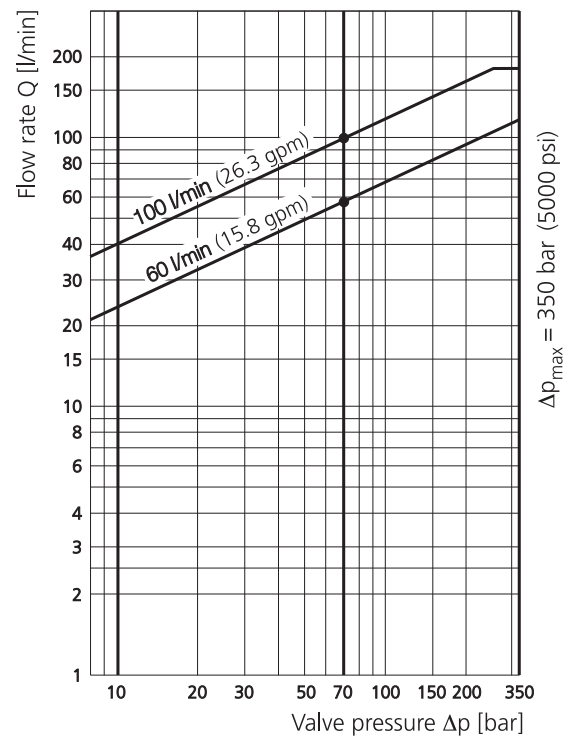

Pressure signal characteristic curve

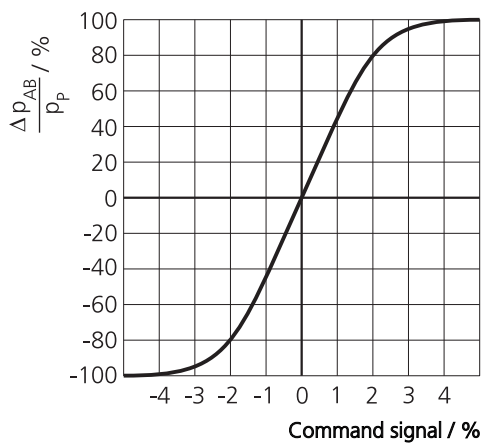

## INSTALLATION DRAWING

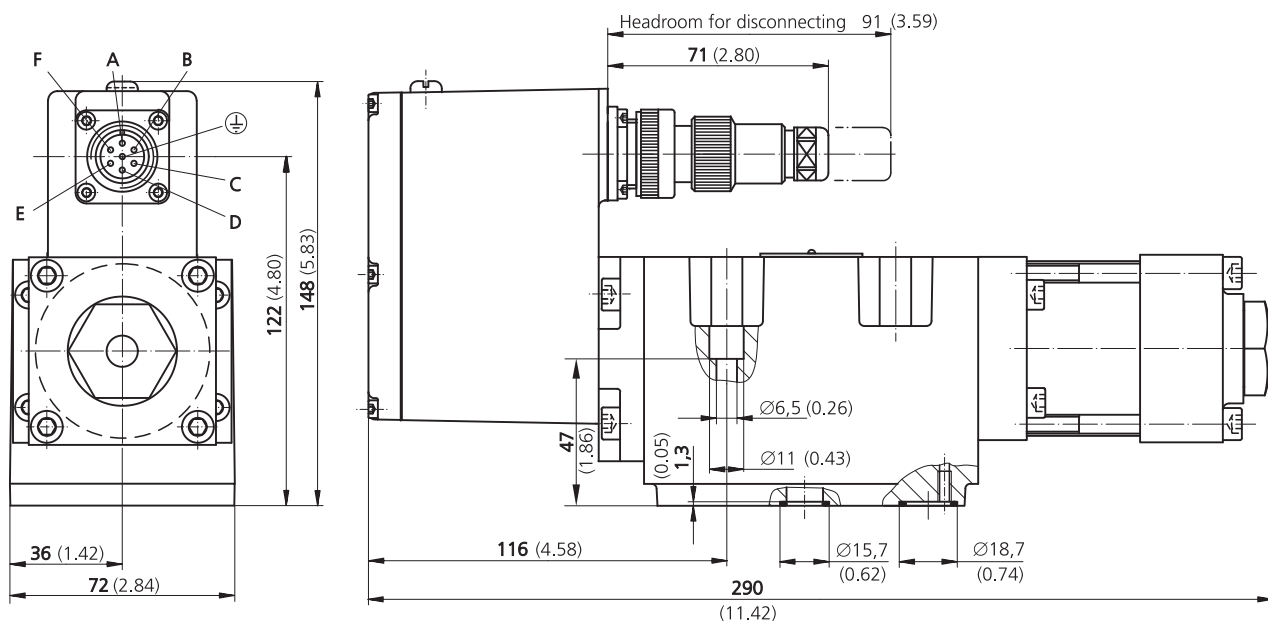

### Mounting pattern


ISO 4401-05-05-0-94, without X port

mm

|   | P     | A     | B     | T     | T <sub>2</sub> | X <sup>1)</sup> | Y     | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> |
|---|-------|-------|-------|-------|----------------|-----------------|-------|----------------|----------------|----------------|----------------|
|   | Ø11,2 | Ø11,2 | Ø11,2 | Ø11,2 | Ø11,2          |                 | Ø 6,3 | M6             | M6             | M6             | M6             |
| x | 27    | 16,7  | 37,3  | 3,2   | 50,8           |                 | 62    | 0              | 54             | 54             | 0              |
| y | 6,3   | 21,4  | 21,4  | 32,5  | 32,5           |                 | 11    | 0              | 0              | 46             | 46             |

inch

|   | P     | A     | B     | T     | T <sub>2</sub> | X <sup>1)</sup> | Y      | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> |
|---|-------|-------|-------|-------|----------------|-----------------|--------|----------------|----------------|----------------|----------------|
|   | Ø0.44 | Ø0.44 | Ø0.44 | Ø0.44 | Ø0.44          |                 | Ø 0.25 | M6             | M6             | M6             | M6             |
| x | 1.06  | 0.66  | 1.47  | 0.13  | 2.00           |                 | 2.44   | 0              | 2.13           | 2.13           | 0              |
| y | 0.25  | 0.84  | 0.84  | 1.28  | 1.28           |                 | 0.43   | 0              | 0              | 1.81           | 1.81           |

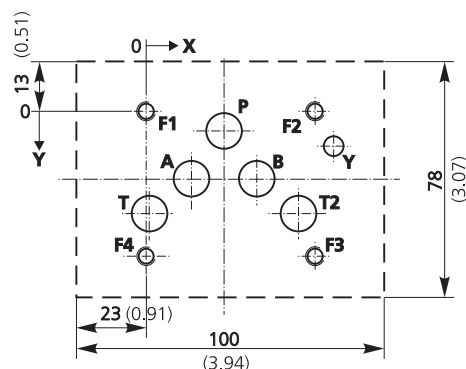

<sup>1)</sup> Port X must not be drilled, not sealed at valve base.

Mounting surface needs flat within 0,01 mm (0.0004 in) over a distance of 100 mm (3.94 in). Average surface finish value, Ra = 0.8 µm.

## Spare parts and Accessories

|                                                                                           |                                                                                           |                                        |                                                                   |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------------------------|
| O-Rings (included in delivery)<br>for ports P,T,T <sub>2</sub> ,A,B<br>for port Y         | 5 pieces ID 12.4 x Ø 1.8 (ID 0.49 x Ø 0.07)<br>1 piece ID 15.6 x Ø 1.8 (ID 0.61 x Ø 0.07) | NBR 90 Shore<br>45122 004<br>45122 011 | FPM 90 Shore<br>42082 004<br>42082 011                            |
| Mating connector, waterproof IP65 (not included in delivery)<br>6+PE-pole                 | B97007 061                                                                                | EN 175201 Part 804                     | for cable dia min. Ø 10 mm (0.394 in),<br>max. Ø 12 mm (0.472 in) |
| Flushing plates                                                                           | for P,A,B,T,T <sub>2</sub> ,X,Y<br>B67728 001                                             |                                        |                                                                   |
| Flushing plates                                                                           | for P,A,B,T,T <sub>2</sub> ,X,Y<br>B67728 002                                             |                                        |                                                                   |
| Flushing plates                                                                           | for P,A,B,T,T <sub>2</sub> ,X,Y<br>B67728 003                                             |                                        |                                                                   |
| Mounting manifolds                                                                        | on request                                                                                |                                        |                                                                   |
| Mounting bolts (not included in delivery)<br>M 6 x 60 DIN EN ISO 4762-10.9 A03665 060 060 | required torque<br>13 Nm (115 inch pounds)                                                | required<br>4 pieces                   |                                                                   |

## ORDERING INFORMATION

| Model-Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                        |                                                                        |        | Type designation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------|--------|-----------|---------|---|------|-----------|----------|---|------|-----------|------------------|---------------------------------------|----------|--------------------------|------------------------------------------|----------|------------------|-----------------------------------------------|-----------|----------|------------------------------------------------------------------------|-----------|------------|--------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|----------|--------------|----------|---------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------|
| <b>D 63</b> . . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                        |                                                                        |        | . . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Series</b><br><b>3</b> Size 03<br><b>4</b> Size 05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                        |                                                                        |        | <b>Supply voltage</b><br><b>2</b> 24 VDC (19 to 32 VDC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Specification-Status</b><br><b>-</b> Series specification<br><b>E</b> Preseries specification<br><b>K</b> explosion proof version upon request<br><b>Z</b> Special specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                        |                                                                        |        | <b>Signals for 100% spool stroke*</b><br><table border="1"> <thead> <tr> <th></th> <th>Command</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td><b>M</b></td> <td>±10 VDC</td> <td>+4 to +20 mA</td> </tr> <tr> <td><b>X</b></td> <td>±10 mA, floating</td> <td>+4 to +20 mA deadband compensation on request</td> </tr> </tbody> </table>                                                                                                                                                                                                                                          |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           | Command          | Output                                | <b>M</b> | ±10 VDC                  | +4 to +20 mA                             | <b>X</b> | ±10 mA, floating | +4 to +20 mA deadband compensation on request |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Command                                                                                                | Output                                                                 |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>M</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ±10 VDC                                                                                                | +4 to +20 mA                                                           |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>X</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ±10 mA, floating                                                                                       | +4 to +20 mA deadband compensation on request                          |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Model designation</b><br>assigned at the factory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                        |                                                                        |        | <b>Valve connector</b><br><b>S</b> 6+PE pole EN 175201 Part 804                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Factory identification</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                        |                                                                        |        | <b>Seal material</b><br><b>N</b> NBR (Buna)<br><b>V</b> FPM<br>others on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Valve version</b><br><b>R</b> with integrated electronics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                        |                                                                        |        | <b>Y- port</b><br><table border="1"> <tbody> <tr> <td><b>0</b></td> <td>closed with plug</td> <td><math>p_{Tmax} = 50 \text{ bar (715 psi)}</math></td> </tr> <tr> <td><b>3</b></td> <td>open, with filter insert</td> <td><math>p &gt; 50 \text{ bar (715 psi)}</math></td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                    |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      | <b>0</b>  | closed with plug | $p_{Tmax} = 50 \text{ bar (715 psi)}$ | <b>3</b> | open, with filter insert | $p > 50 \text{ bar (715 psi)}$           |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>0</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | closed with plug                                                                                       | $p_{Tmax} = 50 \text{ bar (715 psi)}$                                  |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>3</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | open, with filter insert                                                                               | $p > 50 \text{ bar (715 psi)}$                                         |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Rated flow</b><br><table border="1"> <thead> <tr> <th></th> <th><math>Q_N [l/min]</math> at <math>\Delta p_N = 35 \text{ bar}</math><br/>(<math>Q_N [gpm]</math> at <math>\Delta p_N = 500 \text{ psi}</math>)</th> <th><math>\Delta p_N = 5 \text{ bar per land}</math></th> <th>Series</th> </tr> </thead> <tbody> <tr> <td><b>02</b></td> <td>5 (1.3)</td> <td>2</td> <td>D633</td> </tr> <tr> <td><b>04</b></td> <td>10 (2.6)</td> <td>4</td> <td>D633</td> </tr> <tr> <td><b>08</b></td> <td>20 (5.3)</td> <td>8</td> <td>D633</td> </tr> <tr> <td><b>16</b></td> <td>40 (10.6)</td> <td>16</td> <td>D633</td> </tr> <tr> <td><b>24</b></td> <td>60 (15.8)</td> <td>24</td> <td>D634</td> </tr> <tr> <td><b>40</b></td> <td>100 (26.3)</td> <td>40</td> <td>D634</td> </tr> </tbody> </table> |                                                                                                        |                                                                        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $Q_N [l/min]$ at $\Delta p_N = 35 \text{ bar}$<br>( $Q_N [gpm]$ at $\Delta p_N = 500 \text{ psi}$ ) | $\Delta p_N = 5 \text{ bar per land}$ | Series | <b>02</b> | 5 (1.3) | 2 | D633 | <b>04</b> | 10 (2.6) | 4 | D633 | <b>08</b> | 20 (5.3)         | 8                                     | D633     | <b>16</b>                | 40 (10.6)                                | 16       | D633             | <b>24</b>                                     | 60 (15.8) | 24       | D634                                                                   | <b>40</b> | 100 (26.3) | 40                       | D634 | <b>Spool position without electric supply</b><br><table border="1"> <tbody> <tr> <td><b>M</b></td> <td>mid position</td> </tr> <tr> <td><b>F</b></td> <td>P <math>\blacktriangleright</math> B, A <math>\blacktriangleright</math> T connected (10% open)</td> </tr> <tr> <td><b>D</b></td> <td>P <math>\blacktriangleright</math> A, B <math>\blacktriangleright</math> T connected (10% open)<br/>other openings on request</td> </tr> </tbody> </table> |  |  |  |  |  |  |  |  |  |  |  | <b>M</b> | mid position | <b>F</b> | P $\blacktriangleright$ B, A $\blacktriangleright$ T connected (10% open) | <b>D</b> | P $\blacktriangleright$ A, B $\blacktriangleright$ T connected (10% open)<br>other openings on request |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | $Q_N [l/min]$ at $\Delta p_N = 35 \text{ bar}$<br>( $Q_N [gpm]$ at $\Delta p_N = 500 \text{ psi}$ )    | $\Delta p_N = 5 \text{ bar per land}$                                  | Series |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>02</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5 (1.3)                                                                                                | 2                                                                      | D633   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>04</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 10 (2.6)                                                                                               | 4                                                                      | D633   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>08</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 20 (5.3)                                                                                               | 8                                                                      | D633   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>16</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 40 (10.6)                                                                                              | 16                                                                     | D633   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>24</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60 (15.8)                                                                                              | 24                                                                     | D634   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>40</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 100 (26.3)                                                                                             | 40                                                                     | D634   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>M</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | mid position                                                                                           |                                                                        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>F</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | P $\blacktriangleright$ B, A $\blacktriangleright$ T connected (10% open)                              |                                                                        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>D</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | P $\blacktriangleright$ A, B $\blacktriangleright$ T connected (10% open)<br>other openings on request |                                                                        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Maximum operating pressure</b><br><b>K</b> 350 bar (5000 psi)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                        |                                                                        |        | <b>Linear motor</b> Series<br><table border="1"> <tbody> <tr> <td><b>1</b></td> <td>Standard</td> <td>D633</td> </tr> <tr> <td><b>2</b></td> <td>Standard</td> <td>D634</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      | <b>1</b>  | Standard         | D633                                  | <b>2</b> | Standard                 | D634                                     |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>1</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Standard                                                                                               | D633                                                                   |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Standard                                                                                               | D634                                                                   |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                        |                                                                        |        | <b>Bushing / Spool type</b><br><table border="1"> <tbody> <tr> <td><b>0</b></td> <td>4-way:</td> <td>axis cut, linear characteristic</td> </tr> <tr> <td><b>A</b></td> <td>4-way:</td> <td>1,5 to 3% overlap, linear characteristic</td> </tr> <tr> <td><b>D</b></td> <td>4-way:</td> <td>10% overlap, linear characteristic</td> </tr> <tr> <td><b>Z</b></td> <td>2x2-way:</td> <td>P <math>\blacktriangleright</math> A, B <math>\blacktriangleright</math> T, with Y-port only</td> </tr> <tr> <td><b>X</b></td> <td></td> <td>Special spool on request</td> </tr> </tbody> </table> |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      | <b>0</b>  | 4-way:           | axis cut, linear characteristic       | <b>A</b> | 4-way:                   | 1,5 to 3% overlap, linear characteristic | <b>D</b> | 4-way:           | 10% overlap, linear characteristic            | <b>Z</b>  | 2x2-way: | P $\blacktriangleright$ A, B $\blacktriangleright$ T, with Y-port only | <b>X</b>  |            | Special spool on request |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>0</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4-way:                                                                                                 | axis cut, linear characteristic                                        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>A</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4-way:                                                                                                 | 1,5 to 3% overlap, linear characteristic                               |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>D</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4-way:                                                                                                 | 10% overlap, linear characteristic                                     |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>Z</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 2x2-way:                                                                                               | P $\blacktriangleright$ A, B $\blacktriangleright$ T, with Y-port only |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |
| <b>X</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                        | Special spool on request                                               |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                     |                                       |        |           |         |   |      |           |          |   |      |           |                  |                                       |          |                          |                                          |          |                  |                                               |           |          |                                                                        |           |            |                          |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |  |  |          |              |          |                                                                           |          |                                                                                                        |

Options may increase price and delivery.  
 All combinations may not be available.  
 Preferred configurations are highlighted.  
 Technical changes are reserved.

\*(input voltage limited, see page 6)

# TAKE A CLOSER LOOK.

Moog solutions are only a click away. Visit our worldwide Web site for more information and the Moog facility nearest you.

Argentina  
+54 11 4326 5916  
info.argentina@moog.com

Ireland  
+353 21 451 9000  
info.ireland@moog.com

Spain  
+34 902 133 240  
info.spain@moog.com

Australia  
+61 3 9561 6044  
info.australia@moog.com

Italy  
+39 0 332 421 111  
info.italy@moog.com

Sweden  
+46 31 680 060  
info.sweden@moog.com

Austria  
+43 664 144 6580  
info.austria@moog.com

Japan  
+81 46 355 3767  
info.japan@moog.com

Switzerland  
+41 71 394 5010  
info.switzerland@moog.com

Brazil  
+55 11 3572 0400  
info.brazil@moog.com

Korea  
+82 31 764 6711  
info.korea@moog.com

United Kingdom  
+44 168 429 6600  
info.uk@moog.com

China  
+86 21 2893 1600  
info.china@moog.com

Luxembourg  
+352 40 46 401  
info.luxembourg@moog.com

USA  
+1 1 716 652 2000  
info.usa@moog.com

Finland  
+358 9 2517 2730  
info.finland@moog.com

Netherlands  
+31 252 462 000  
info.netherlands@moog.com

France  
+33 1 4560 7000  
info.france@moog.com

Norway  
+47 6494 1948  
info.norway@moog.com

Germany  
+49 7031 622 0  
info.germany@moog.com

Russia  
+7 831 713 1811  
info.russia@moog.com

Hong Kong  
+852 2 635 3200  
info.hongkong@moog.com

Singapore  
+65 677 36238  
info.singapore@moog.com

India  
+91 80 4120 8785  
info.india@moog.com

South Africa  
+27 12 653 6768  
info.southafrica@moog.com

[www.moog.com/industrial](http://www.moog.com/industrial)

Moog is a registered trademark of Moog, Inc. All trademarks as indicated herein are the property of Moog Inc. and its subsidiaries. All rights reserved.  
©2009 Moog Inc.

D633 and D634 Servovalves  
GUT/100 04/2009